


Burettes - Acrylic 1

With transparent acrylic body and leakproof PTFE plunger stopcock. Acrylic body is unaffected by dilute minerals acids & bases except hydrofluoric acid and ammonium hydroxide.

Code	Capacity	Sub. Div.	Tolerance ±
CH0233A	25 ml	0.10 ml	0.10 ml
CH0233B	50 ml	0.10 ml	0.10 ml
CH0233C	Spare stopcock for above (Pk. of 5)		

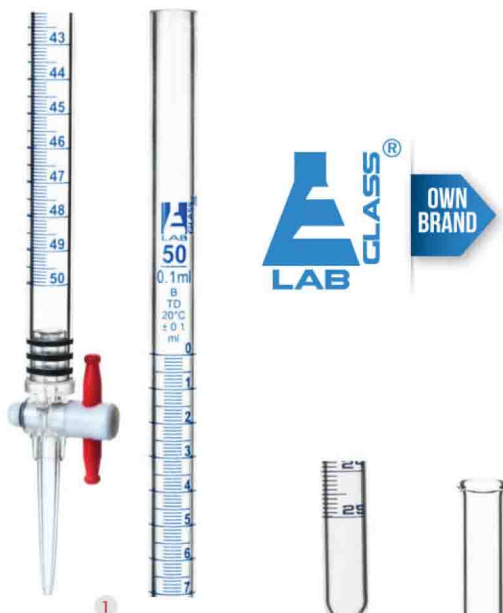

Burettes Glass - Pinch Clip 2

Single bore with detachable rubber tube with pinch clip. Accuracy as per Class B.

Class-B

Code	Capacity	Sub. Div.	Tolerance ±
CH0234A	10 ml	0.05 ml	0.05 ml
CH0234B	25 ml	0.10 ml	0.10 ml
CH0234C	50 ml	0.10 ml	0.10 ml
CH0234D	100 ml	0.20 ml	0.20 ml



BORO 3.3

Burettes - Glass Key 3

Single straight bore, Glass Key stopcock with blue/white ceramic graduation. Accuracy as per DIN ISO 385 standard.

Class-A

Blue Grad.	White Grad.	Capacity	Sub. Div.	Tolerance ±
CH0236A	CH0236A-WT	10 ml	0.05 ml	0.03 ml
CH0236B	CH0236B-WT	25 ml	0.10 ml	0.05 ml
CH0236C	CH0236C-WT	50 ml	0.10 ml	0.05 ml
CH0236D	CH0236D-WT	100 ml	0.20 ml	0.10 ml

Class-B

Blue Grad.	White Grad.	Capacity	Sub. Div.	Tolerance ±
CH0236E	CH0236E-WT	10 ml	0.05 ml	0.05 ml
CH0236F	CH0236F-WT	25 ml	0.10 ml	0.10 ml
CH0236G	CH0236G-WT	50 ml	0.10 ml	0.10 ml
CH0236H	CH0236H-WT	100 ml	0.20 ml	0.20 ml

